



MINMAX[®]

MJWI10 Series


Electric Characteristic Note

MJWI10 Series EC Note

DC-DC CONVERTER 10W, High Power Density

Features

- ▶ Ultra-compact 1"x1" Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ High Efficiency up to 87%
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Conducted EMI EN 55032 Class A Approved
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking

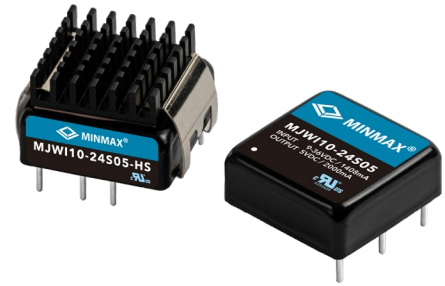

Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The MINMAX MJWI10 series are cost optimized DC-DC converter modules offering 10W output power in a 1"x1"x0.4" shielded metal package with industry standard pinout. All models provide ultra-wide 4:1 input voltage range and fixed output voltage regulation. State-of-the-art circuit topology provides a high efficiency up to 87% which allows an operating temperature range of -40°C to +80°C. Further features include remote On/Off, under-voltage, overload and short circuit protection and safety approval UL/cUL/IEC/EN 62368-1(60950-1) with CB report and CE marking. Typical applications for these converters are battery operated equipment, instrumentation, distributed power architectures in communication and industrial electronics and other space critical applications.

Table of contents

| | | | |
|------------------------------------|-----|--|-----|
| Model Selection Guide | P2 | Recommended Pad Layout for Single & Dual Output Converter..... | P23 |
| Input Specifications..... | P2 | Test Setup..... | P24 |
| Remote On/Off Control..... | P2 | Technical Notes | P24 |
| Output Specifications..... | P3 | Remote On/Off Implementation..... | P25 |
| General Specifications..... | P3 | Packaging Information..... | P25 |
| EMC Specifications..... | P3 | Wave Soldering Considerations | P26 |
| Environmental Specifications | P3 | Hand Welding Parameter | P26 |
| Characteristic Curves | P4 | Part Number Structure | P27 |
| Package Specifications | P22 | MTBF and Reliability | P27 |

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Max. capacitive Load μF | Efficiency (typ.) |
|----------------------|------------------------------|-----------------------|----------------|------|---------------|----------|----------------------------|-------------------|
| | | | Max. | Min. | @Max. Load | @No Load | | @Max. Load |
| | | | mA | mA | mA(typ.) | mA(typ.) | | % |
| MJWI10-24S033 | 24 (9 ~ 36) | 3.3 | 2200 | 330 | 352 | 30 | 560 | 86 |
| MJWI10-24S05 | | 5 | 2000 | 300 | 496 | | 560 | 84 |
| MJWI10-24S051 | | 5.1 | 2000 | 300 | 506 | | 560 | 84 |
| MJWI10-24S12 | | 12 | 830 | 125 | 483 | | 150 | 86 |
| MJWI10-24S15 | | 15 | 660 | 100 | 474 | | 150 | 87 |
| MJWI10-24S24 | | 24 | 410 | 62 | 477 | | 68 | 86 |
| MJWI10-24D05 | | ±5 | ±1000 | ±150 | 496 | | 220# | 84 |
| MJWI10-24D12 | | ±12 | ±410 | ±62 | 477 | | 100# | 86 |
| MJWI10-24D15 | | ±15 | ±330 | ±50 | 474 | | 100# | 87 |
| MJWI10-48S033 | 48 (18 ~ 75) | 3.3 | 2200 | 330 | 180 | 20 | 560 | 85 |
| MJWI10-48S05 | | 5 | 2000 | 300 | 248 | | 560 | 84 |
| MJWI10-48S051 | | 5.1 | 2000 | 300 | 253 | | 560 | 84 |
| MJWI10-48S12 | | 12 | 830 | 125 | 241 | | 150 | 86 |
| MJWI10-48S15 | | 15 | 660 | 100 | 237 | | 150 | 87 |
| MJWI10-48S24 | | 24 | 410 | 62 | 238 | | 68 | 86 |
| MJWI10-48D05 | | ±5 | ±1000 | ±150 | 248 | | 220# | 84 |
| MJWI10-48D12 | | ±12 | ±410 | ±62 | 238 | | 100# | 86 |
| MJWI10-48D15 | | ±15 | ±330 | ±50 | 237 | | 100# | 87 |

For each output

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|------------------|------|------|------|
| Input Surge Voltage (1 sec. max.) | 24V Input Models | -0.7 | --- | 50 | VDC |
| | 48V Input Models | -0.7 | --- | 100 | |
| Start-Up Threshold Voltage | 24V Input Models | --- | --- | 9 | |
| | 48V Input Models | --- | --- | 18 | |
| Under Voltage Shutdown | 24V Input Models | --- | --- | 8.5 | |
| | 48V Input Models | --- | --- | 17 | |
| Short Circuit Input Power | All Models | --- | 2500 | --- | mW |
| Input Filter | | Internal Pi Type | | | |

Remote On/Off Control

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|---|------|------|------|------|
| Converter On | 2.5V ~ 50V or Open Circuit | | | | |
| Converter Off | 0~1.0V or Short Circuit (Pin 2 and Pin 6) | | | | |
| Control Input Current (on) | Vctrl = 5V | --- | --- | 500 | μA |
| Control Input Current (off) | Vctrl = 0V | --- | --- | -500 | μA |
| Control Common | Referenced to Negative Input | | | | |
| Standby Input Current | Nominal Vin | --- | --- | 10 | mA |

| Output Specifications | | | | | |
|---------------------------------|---------------------------------|------|-------|-------|-------------------|
| Parameter | Conditions | Min. | Typ. | Max. | Unit |
| Output Voltage Setting Accuracy | | --- | --- | ±2.0 | %Vnom. |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±1.0 | ±2.0 | % |
| Line Regulation | Vin=Min. to Max. @Full Load | --- | ±0.3 | ±1.0 | % |
| Load Regulation | Io=15% to 100% | --- | ±0.5 | --- | % |
| Ripple & Noise | 0-20 MHz Bandwidth | --- | --- | 100 | mV _{p-p} |
| Transient Recovery Time | 25% Load Step Change | --- | 300 | 600 | µsec |
| Transient Response Deviation | | --- | ±3 | ±6 | % |
| Temperature Coefficient | | --- | ±0.01 | ±0.02 | %/°C |
| Over Load Protection | Hiccup | 110 | 150 | --- | % |
| Short Circuit Protection | Hiccup Mode, Automatic Recovery | | | | |

| General Specifications | | | | | |
|---------------------------|---|---------|------|------|-------|
| Parameter | Conditions | Min. | Typ. | Max. | Unit |
| I/O Isolation Voltage | 60 Seconds | 1500 | --- | --- | VDC |
| | 1 Second | 1800 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ |
| I/O Isolation Capacitance | 100kHz, 1V | --- | --- | 1500 | pF |
| Switching Frequency | | --- | 450 | --- | kHz |
| MTBF(calculated) | MIL-HDBK-217F@25°C, Ground Benign | 350,000 | | | Hours |
| Safety Approvals | UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(CB-report) | | | | |


| EMC Specifications | | | |
|--------------------|--------------------|---------------------------------------|-----------------------------|
| Parameter | Standards & Level | | Performance |
| EMI _(e) | Conduction | EN 55032 | Without external components |
| | Radiation | | With external components |
| EMS _(e) | EN 55024 | | |
| | ESD | EN 61000-4-2 Air ± 8kV , Contact ±6kV | A |
| | Radiated immunity | EN 61000-4-3 10V/m | A |
| | Fast transient | EN 61000-4-4 ±2kV | A |
| | Surge | EN 61000-4-5 ±1kV | A |
| | Conducted immunity | EN 61000-4-6 10Vrms | A |
| | PFMF | EN 61000-4-8 3A/m | A |

| Environmental Specifications | | | |
|--|--------------------------------|------|----------|
| Parameter | Min. | Max. | Unit |
| Operating Ambient Temperature Range (See Power Derating Curve) | -40 | +80 | °C |
| Case Temperature | --- | +100 | °C |
| Storage Temperature Range | -50 | +125 | °C |
| Humidity (non condensing) | --- | 95 | % rel. H |
| RFI | Six-Sided Shielded, Metal Case | | |
| Lead Temperature (1.5mm from case for 10Sec.) | --- | 260 | °C |


| Notes |
|--|
| 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted. |
| 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%. |
| 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed. |
| 4 We recommend to protect the converter by a slow blow fuse in the input supply line. |
| 5 Other input and output voltage may be available, please contact MINMAX. |
| 6 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail. |
| 7 Specifications are subject to change without notice. |

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJWI10-24S033

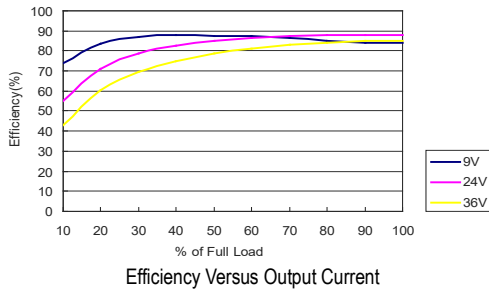


Efficiency Versus Output Current

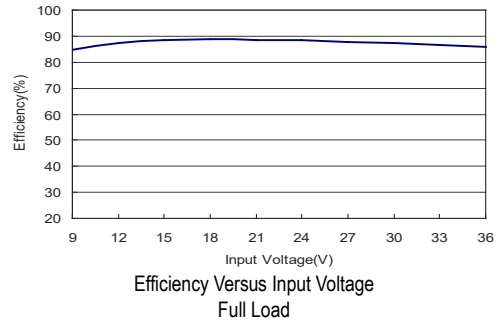


Efficiency Versus Input Voltage Full Load

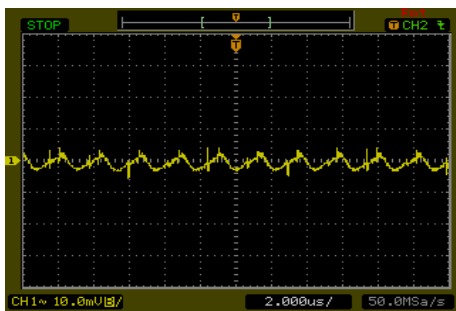


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

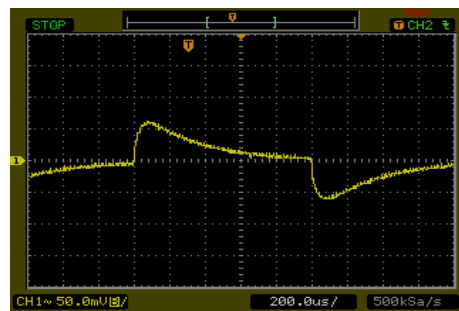


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

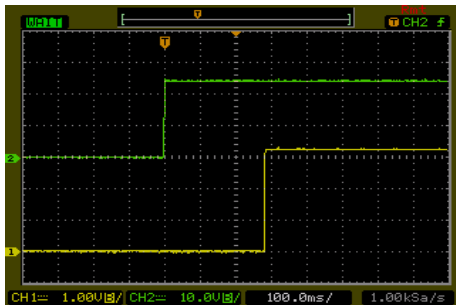

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

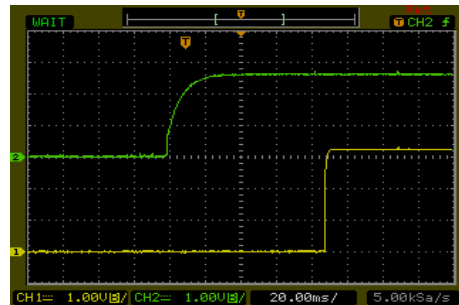




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

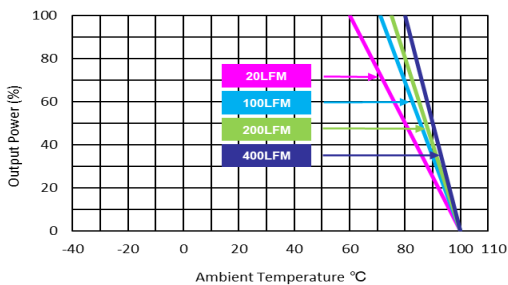


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-24S05

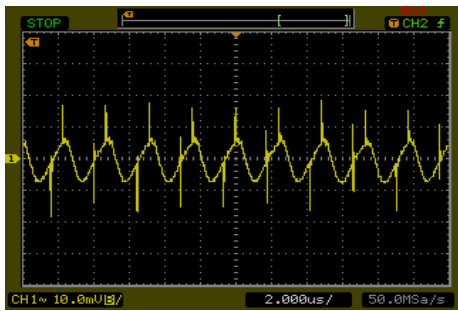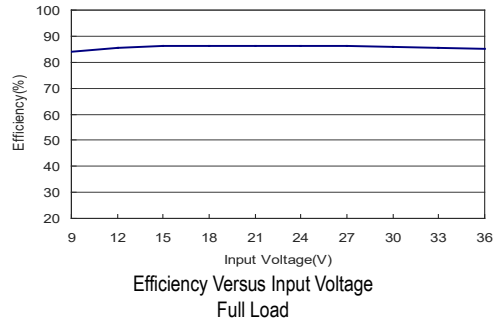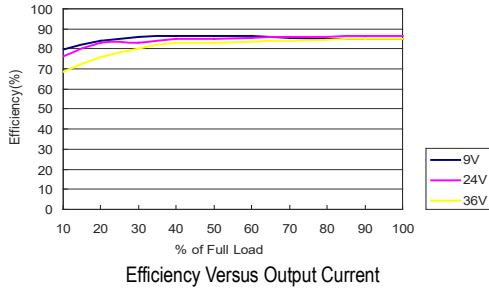


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

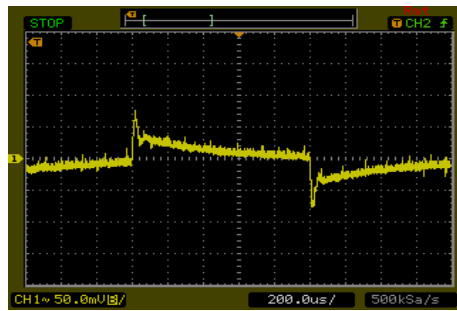


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

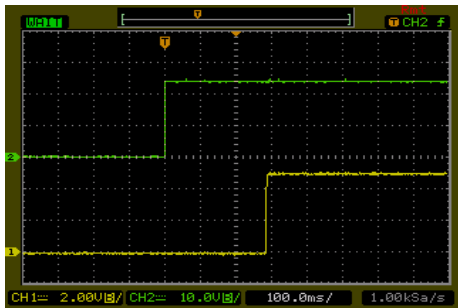

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load



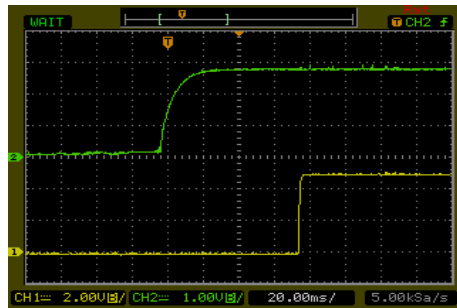


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

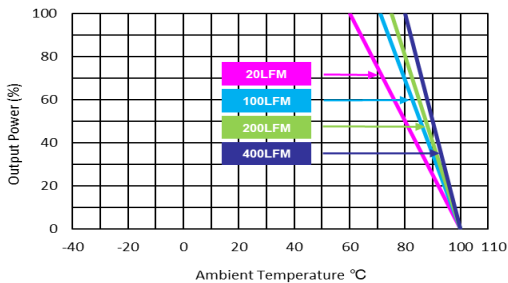


Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-24S051

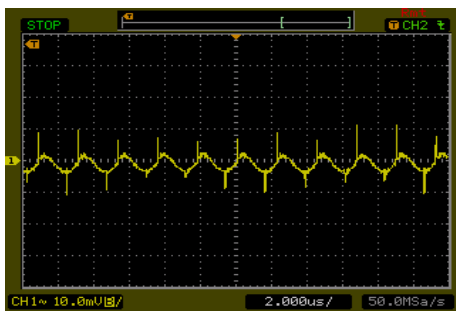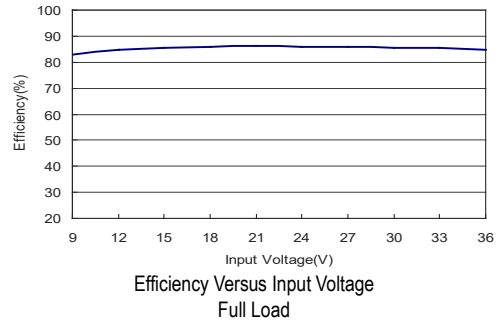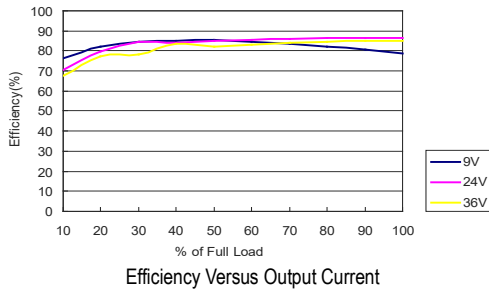


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

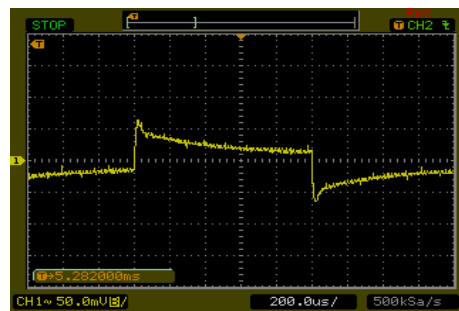


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

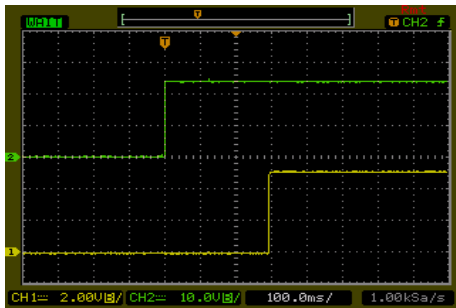

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

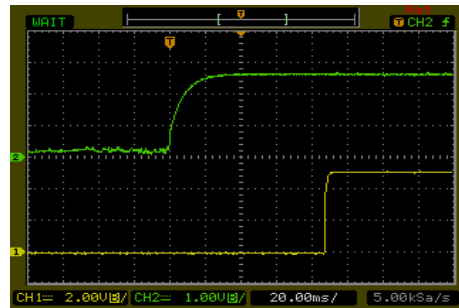




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

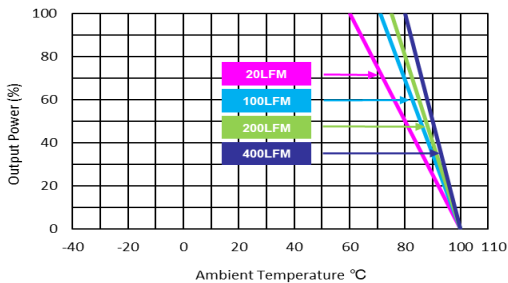


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-24S12

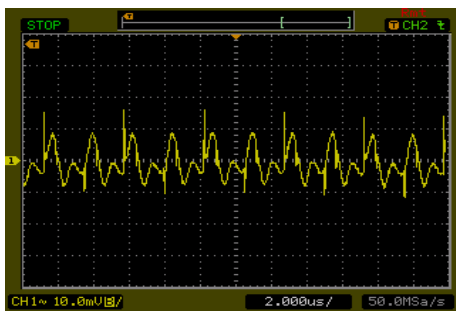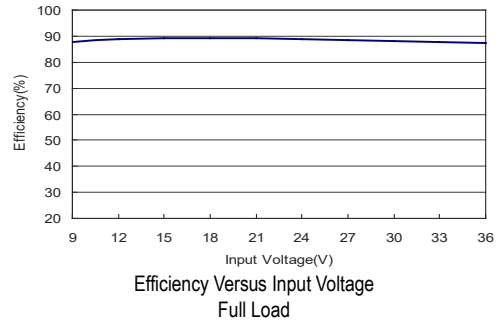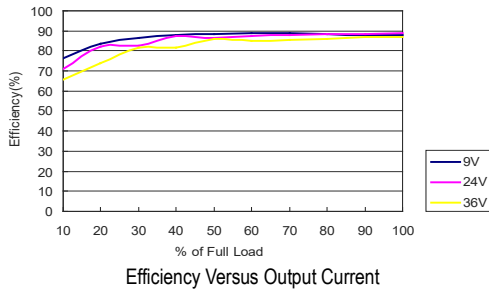


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

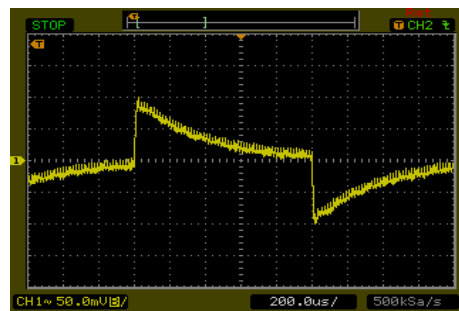


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

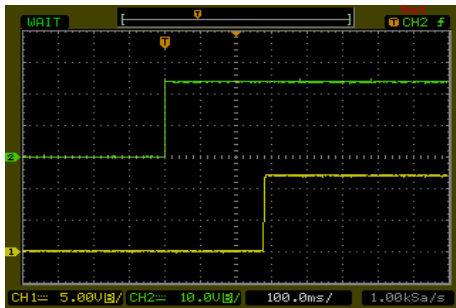

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

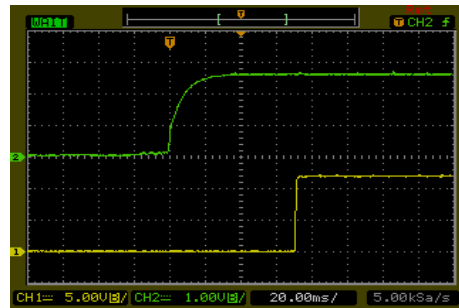




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

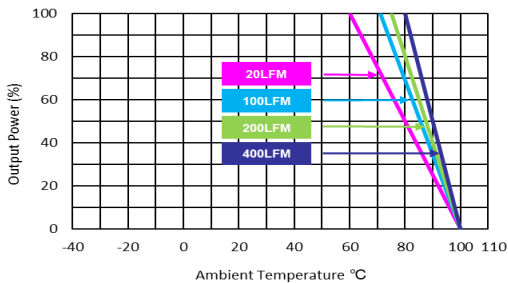


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-24S15

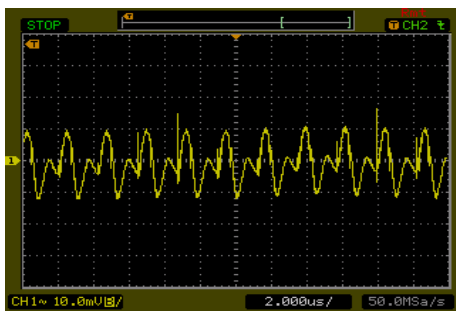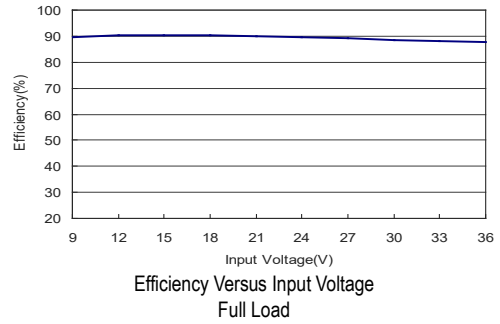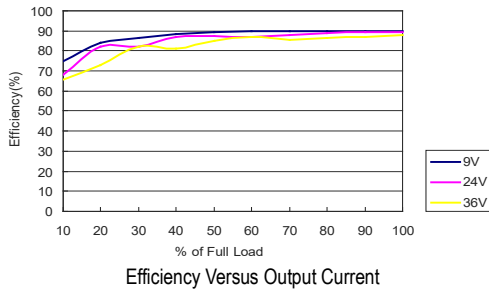


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

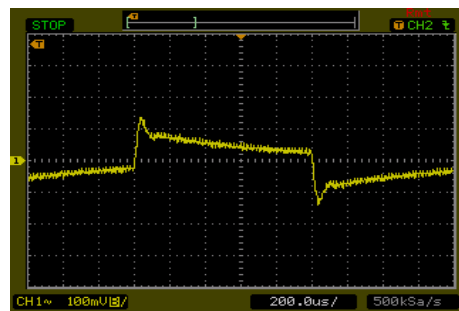


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

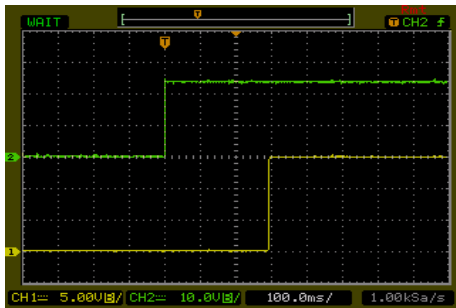

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

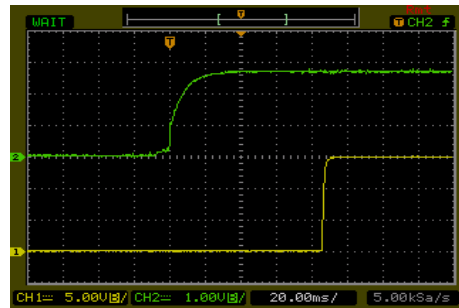


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

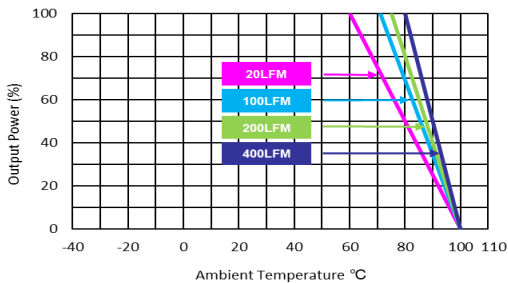


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW110-24S24

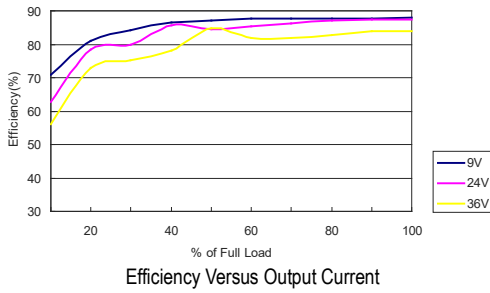


Efficiency Versus Output Current

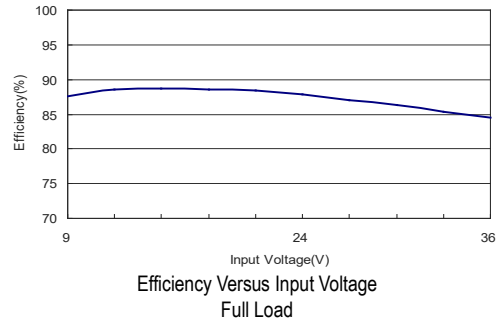


Efficiency Versus Input Voltage Full Load

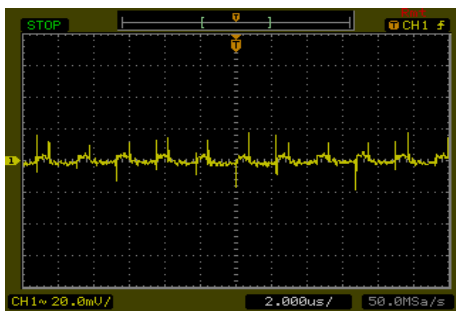


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

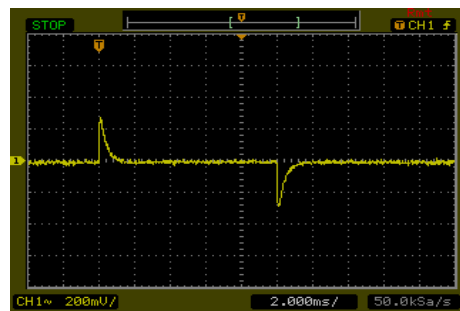


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

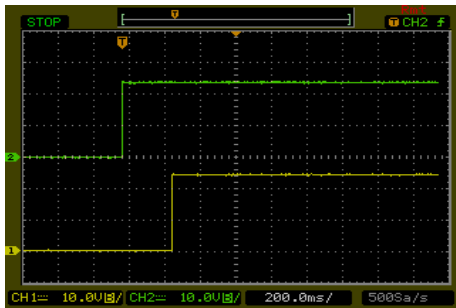

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

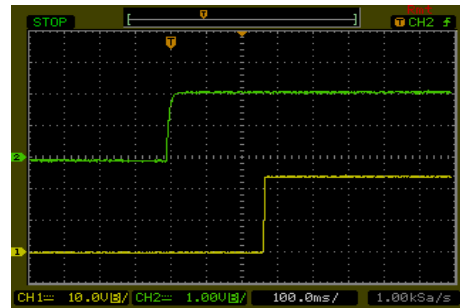



ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

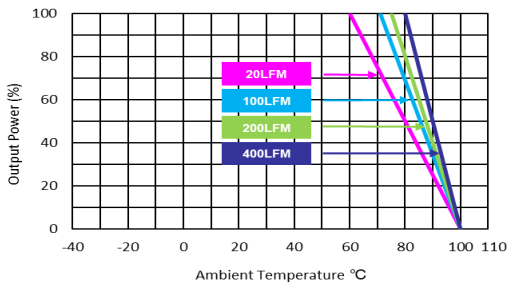


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJWI10-24D05

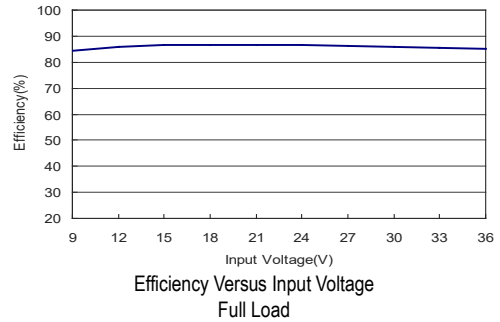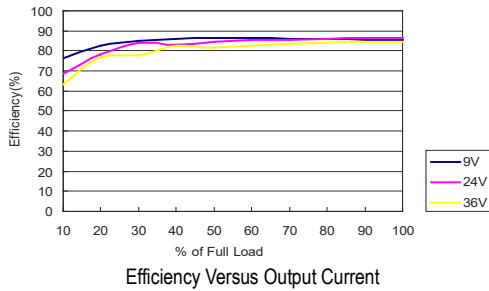


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

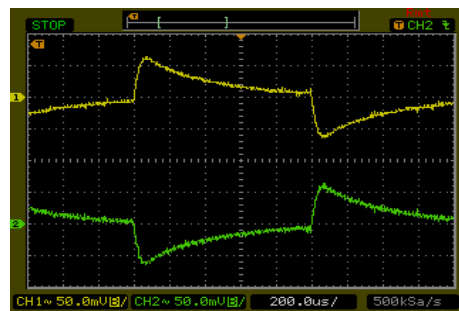


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

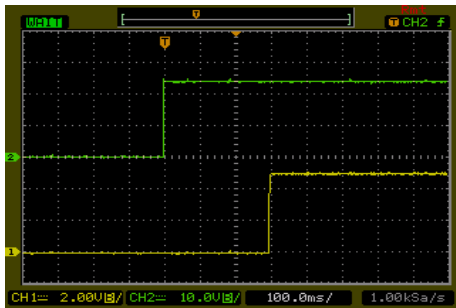

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

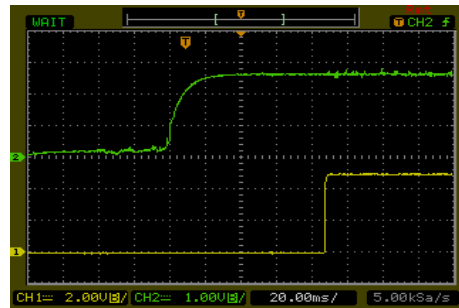


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

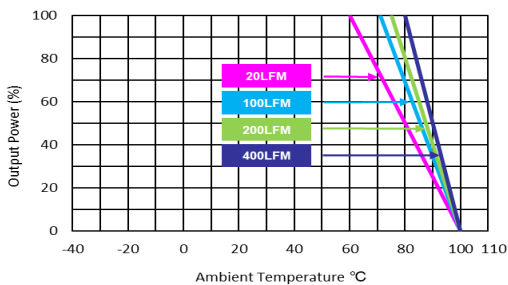


Characteristic Curves

All test conditions are at 25°C The figures are identical for MJW10-24D12

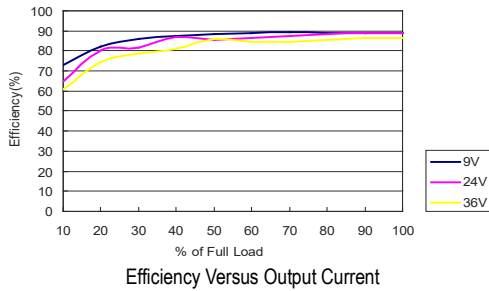

Efficiency Versus Output Current

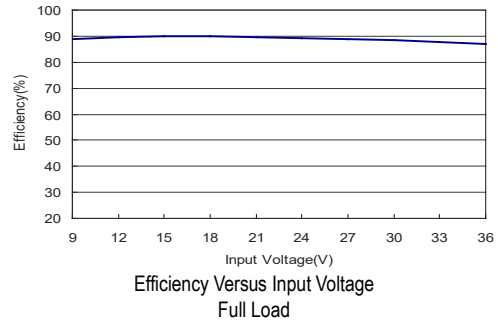


Efficiency Versus Input Voltage Full Load




Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load




Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

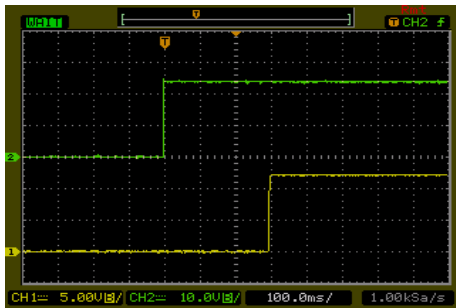

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

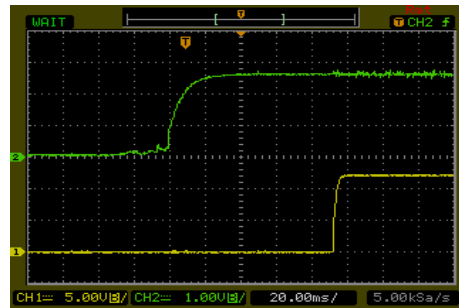







ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

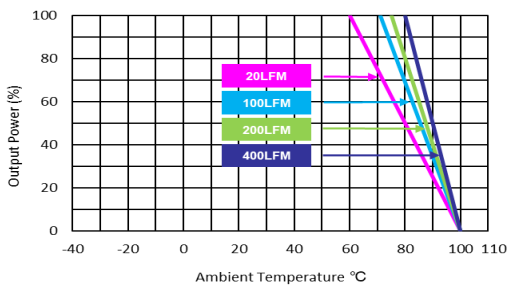

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MJWI10-24D15

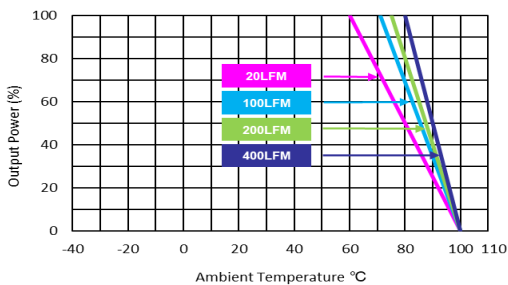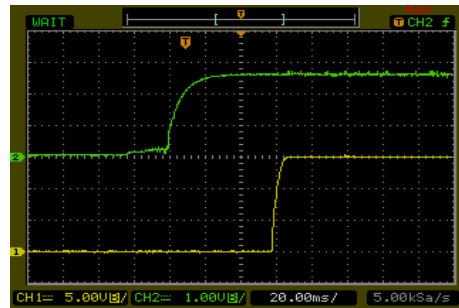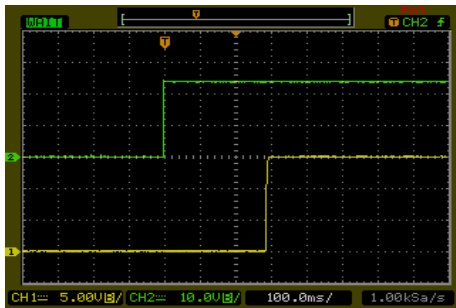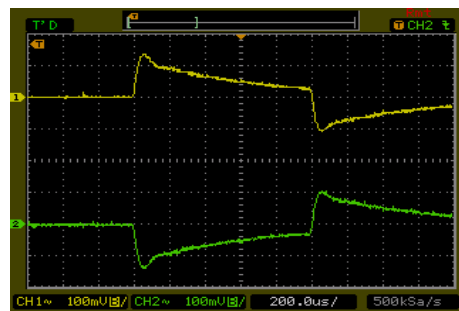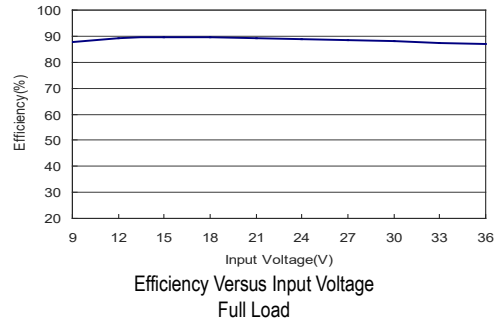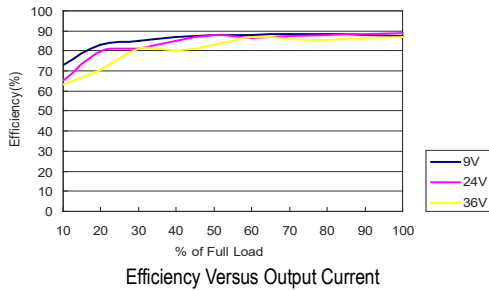


Characteristic Curves


All test conditions are at 25°C The figures are identical for MJWI10-48S033

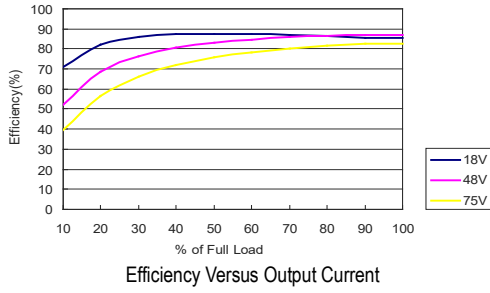


Efficiency Versus Output Current

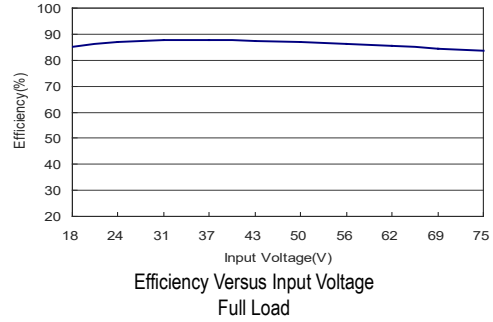


Efficiency Versus Input Voltage Full Load

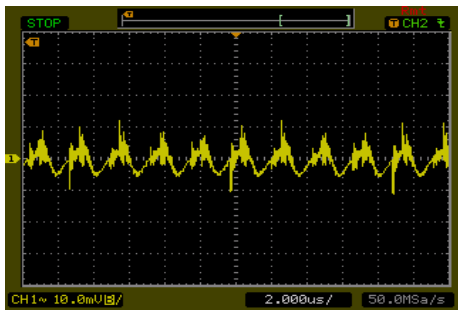


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

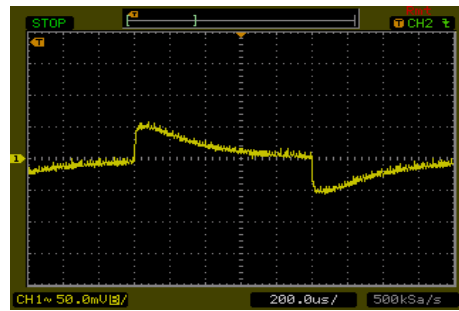


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

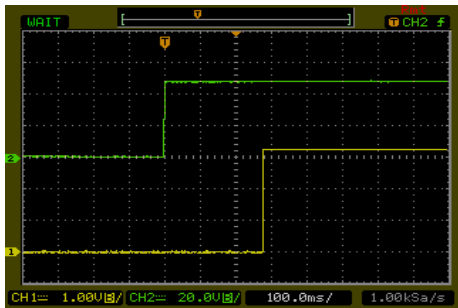

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

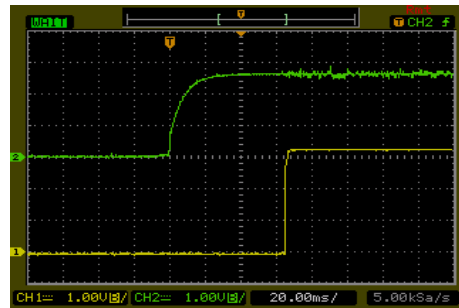


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

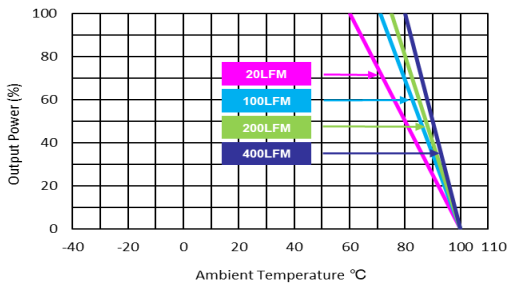


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-48S05

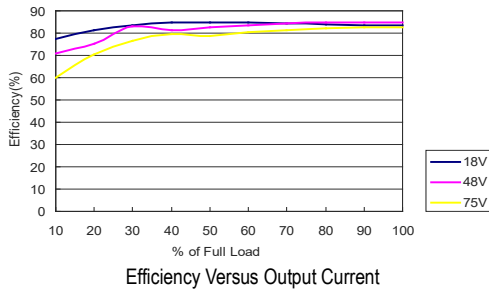


Efficiency Versus Output Current

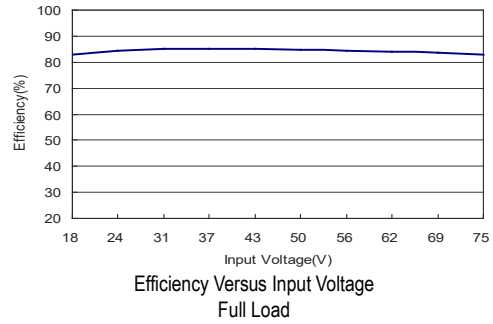


Efficiency Versus Input Voltage Full Load

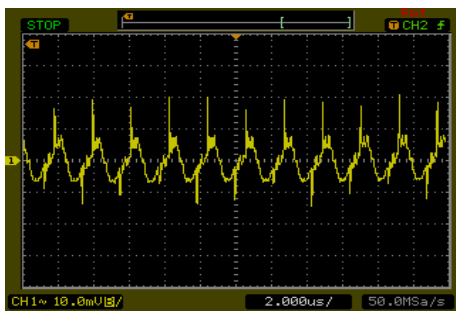


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

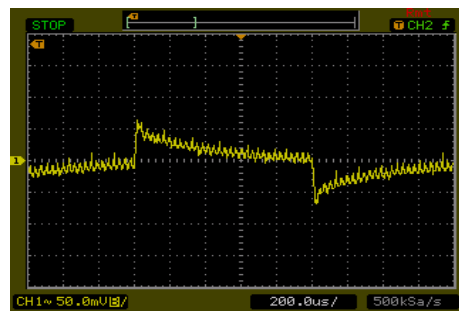


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

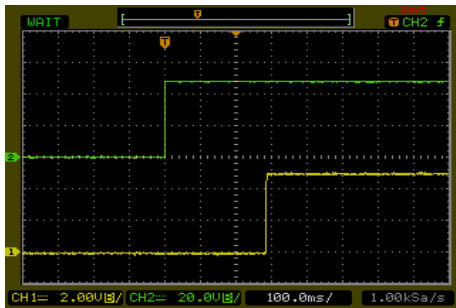

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

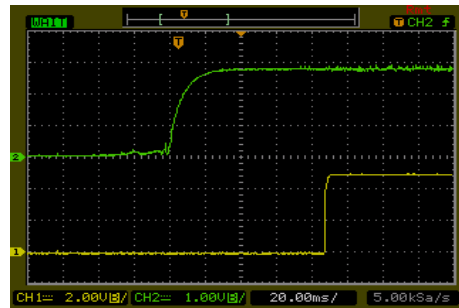


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

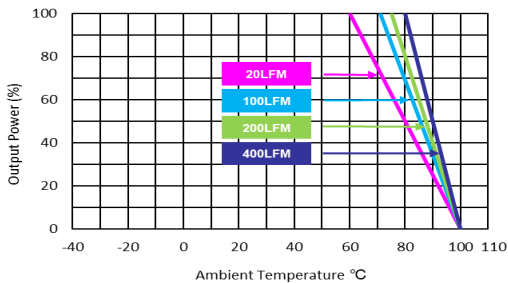


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-48S051

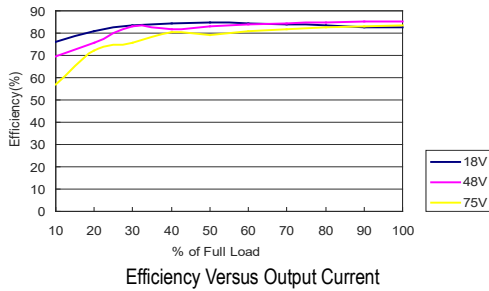


Efficiency Versus Output Current

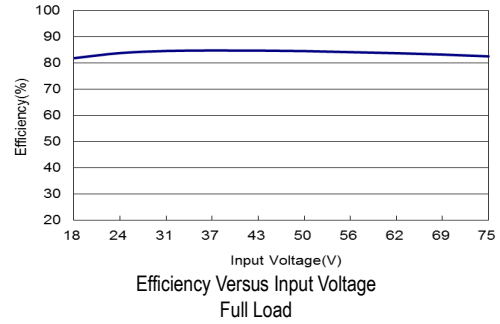


Efficiency Versus Input Voltage Full Load

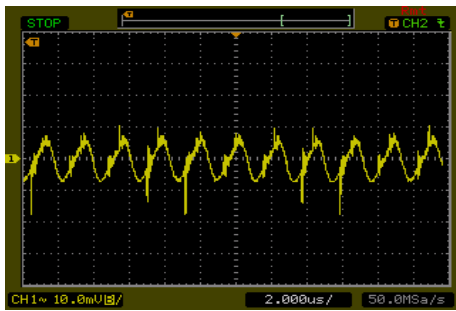


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

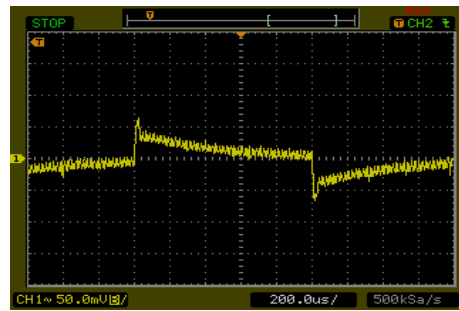


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

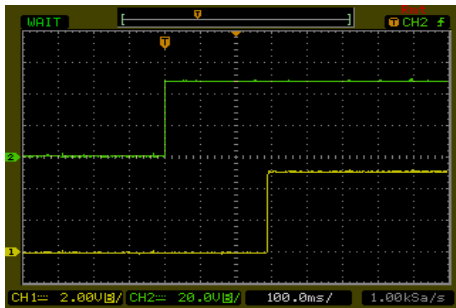

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

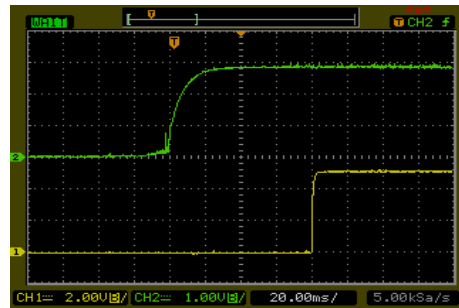


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

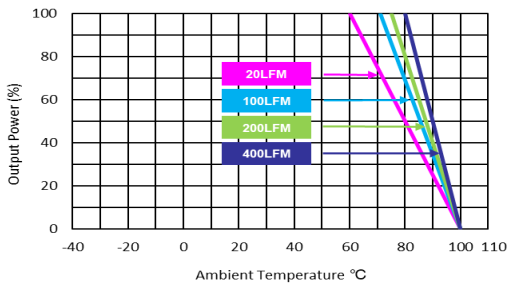


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-48S12

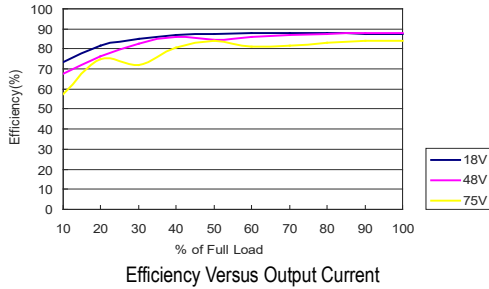


Efficiency Versus Output Current

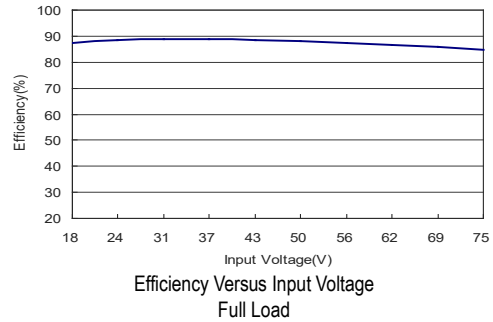


Efficiency Versus Input Voltage Full Load

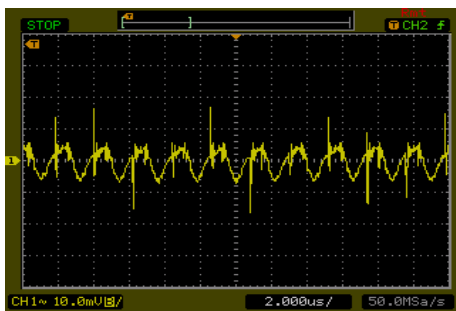


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

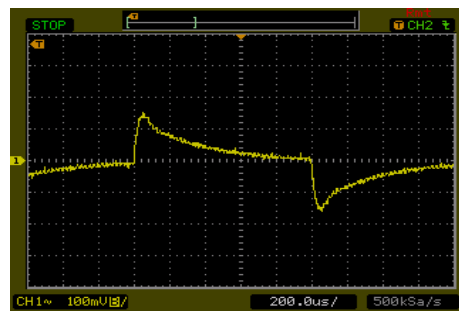


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

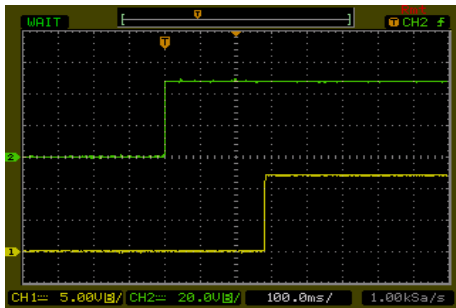

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

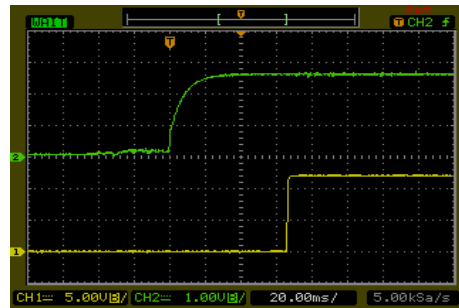




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

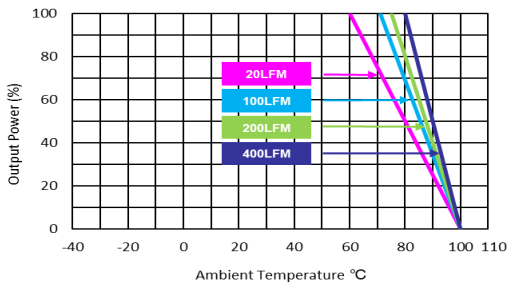


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-48S15

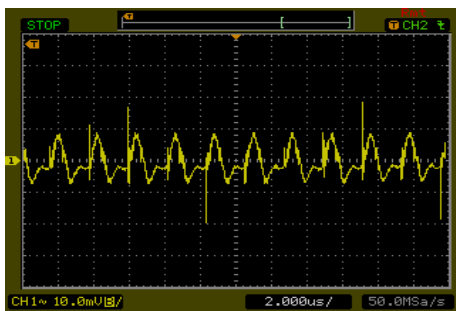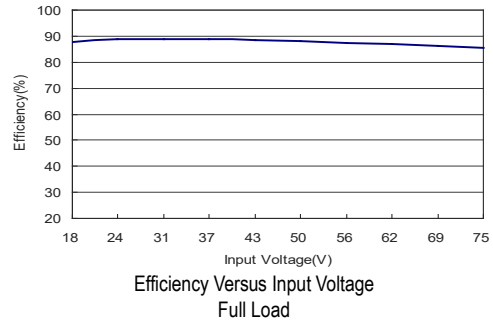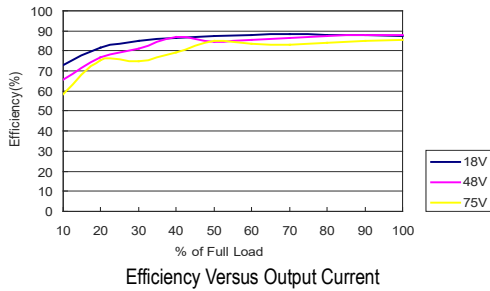


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

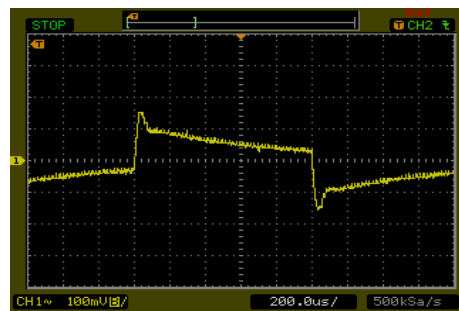


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

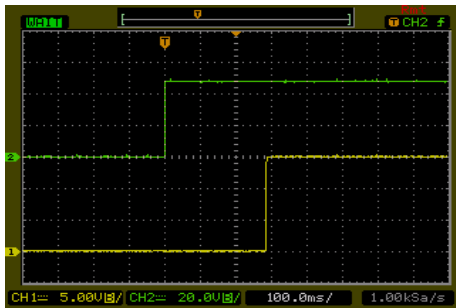

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

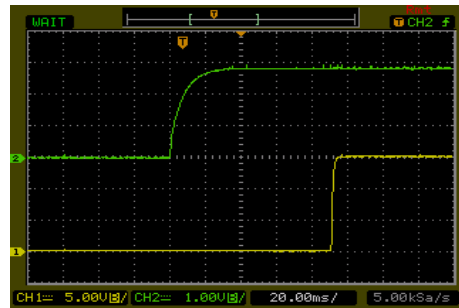


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

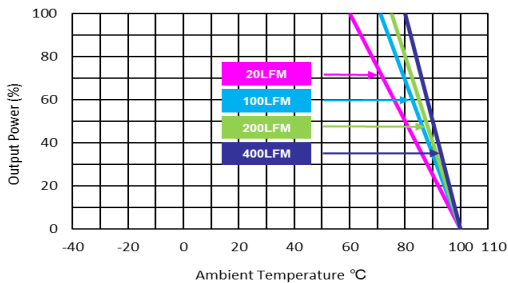


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW110-48S24

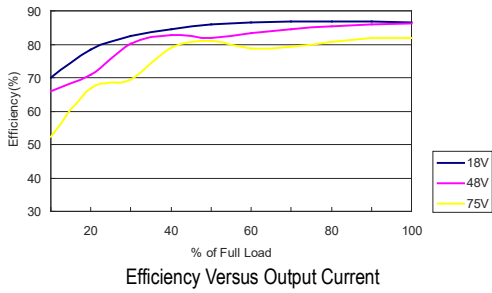


Efficiency Versus Output Current

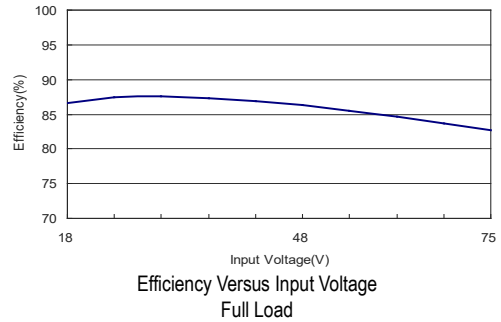


Efficiency Versus Input Voltage Full Load

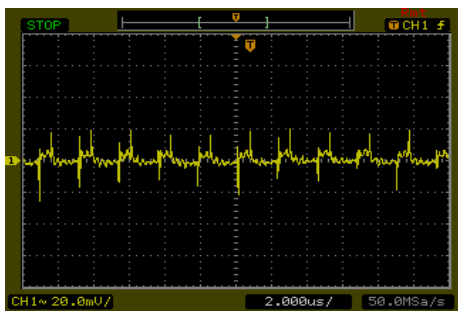


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

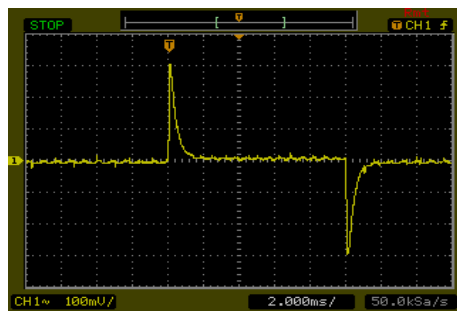


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

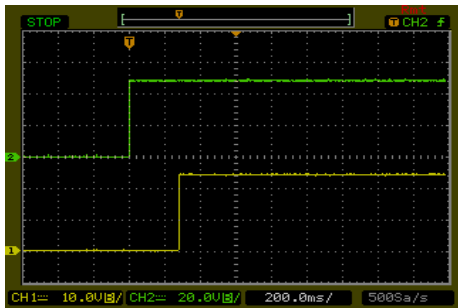

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

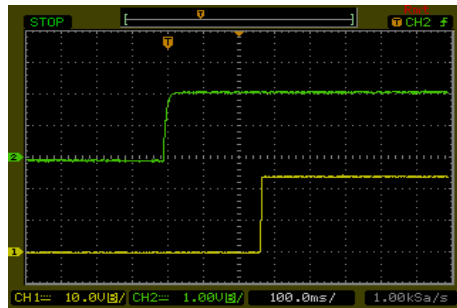



ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

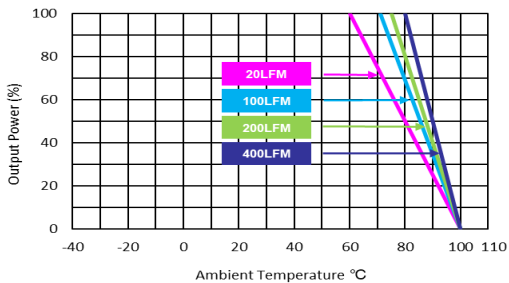


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW110-48D05

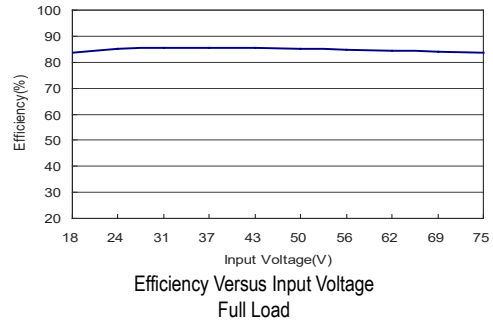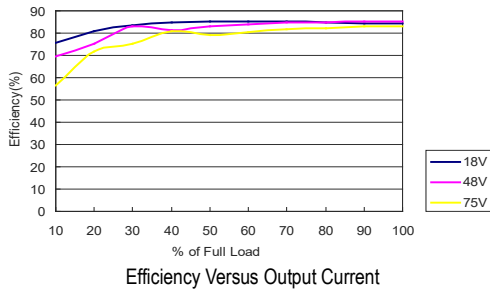


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

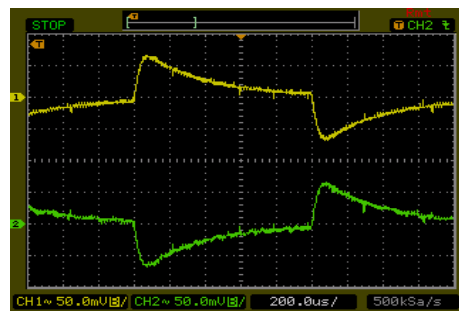


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

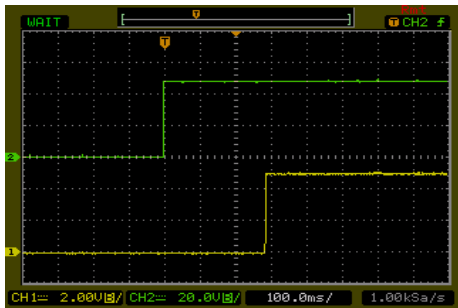

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

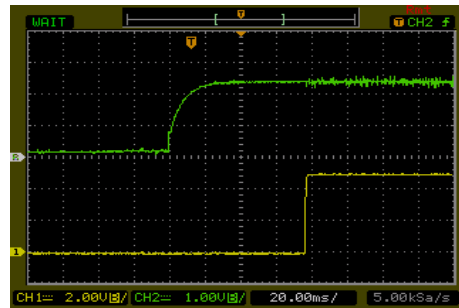


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

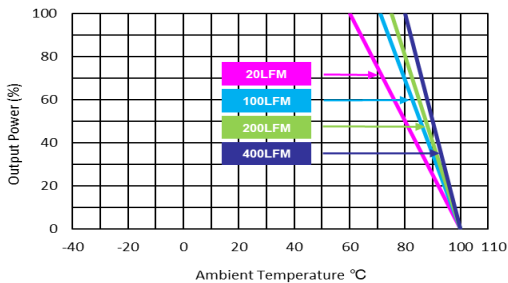


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MJW110-48D12

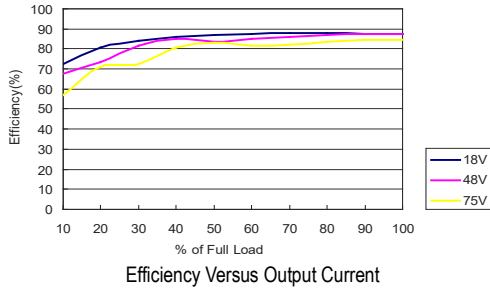

Efficiency Versus Output Current

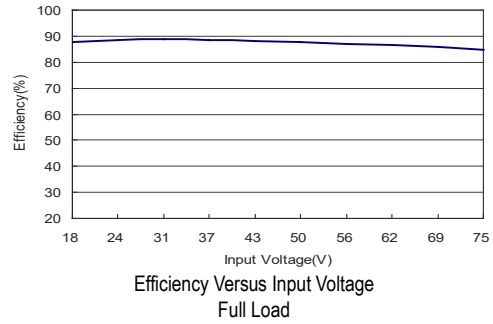


Efficiency Versus Input Voltage Full Load




Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load




Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

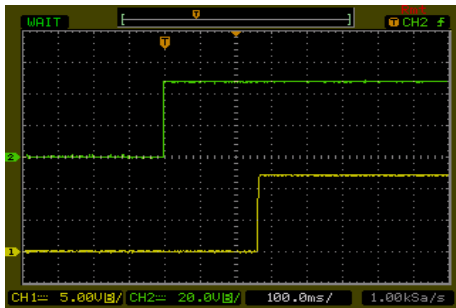

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

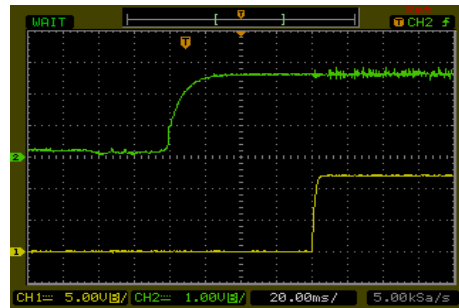


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

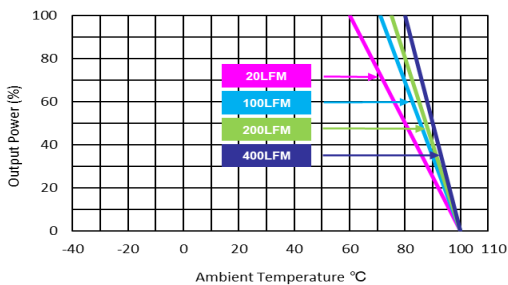


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MJW10-48D15

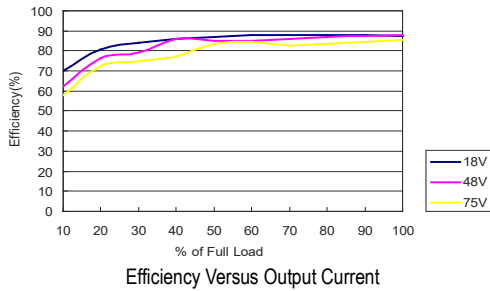


Efficiency Versus Output Current

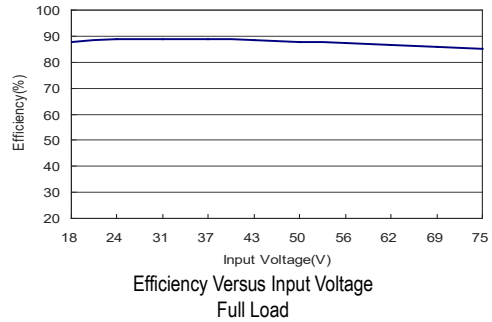


Efficiency Versus Input Voltage Full Load

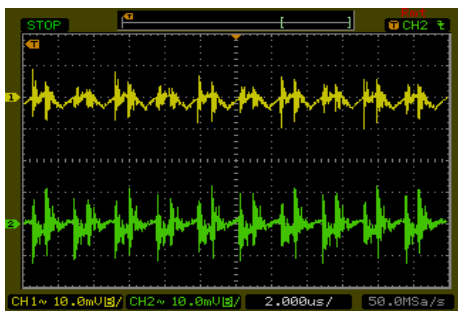


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

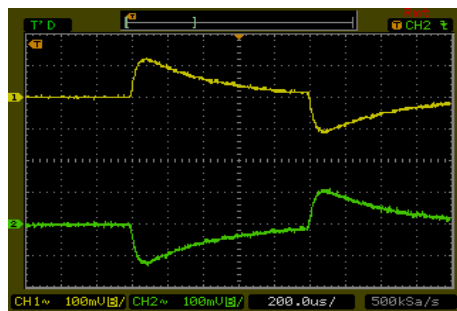


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

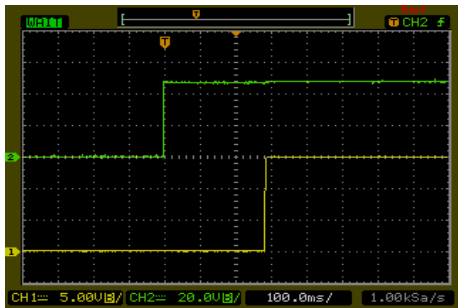

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

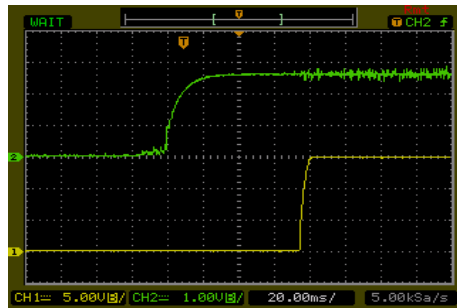


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

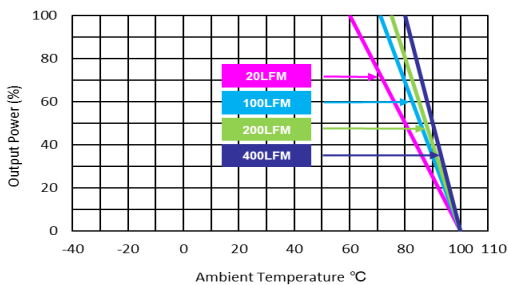

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Package Specifications

Mechanical Dimensions

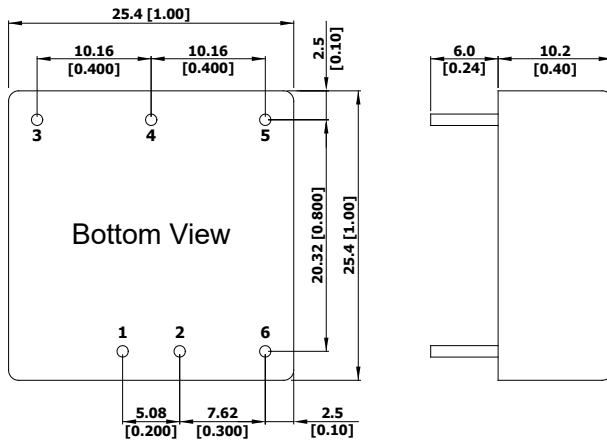

Pin Connections

| Pin | Single Output | Dual Output | Diameter mm (inches) |
|-----|---------------|---------------|----------------------|
| 1 | +Vin | +Vin | ∅ 1.0 [0.04] |
| 2 | -Vin | -Vin | ∅ 1.0 [0.04] |
| 3 | +Vout | +Vout | ∅ 1.0 [0.04] |
| 4 | No Pin | Common | ∅ 1.0 [0.04] |
| 5 | -Vout | -Vout | ∅ 1.0 [0.04] |
| 6 | Remote On/Off | Remote On/Off | ∅ 1.0 [0.04] |


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

Physical Characteristics

| | |
|---------------|--|
| Case Size | : 25.4x25.4x10.2mm (1.0x1.0x0.4 inches) |
| Case Material | : Metal With Non-Conductive Baseplate |
| Base Material | : FR4 PCB (flammability to UL 94V-0 rated) |
| Pin Material | : Copper Alloy |
| Weight | : 15g |

Heatsink (Option -HS)


Mechanical Dimensions

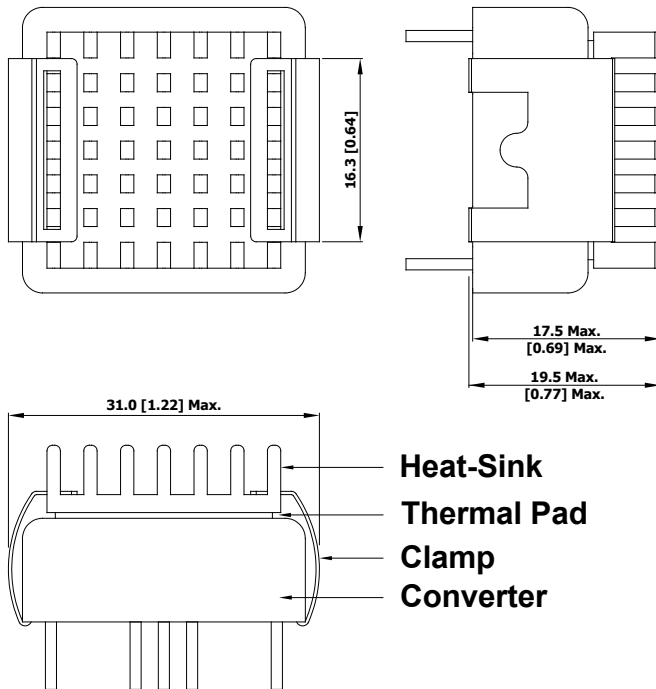

Heatsink Material: Aluminum
 Finish: Anodic treatment (black)
 Weight: 2g

- ▶ The advantages of adding a heatsink are:
 1. To improve heat dissipation and increase the stability and reliability of the DC-DC converters at high operating temperatures.
 2. To increase Operating temperature of the DC-DC converter, please refer to Derating Curve.


Recommended Pad Layout for Single & Dual Output Converter

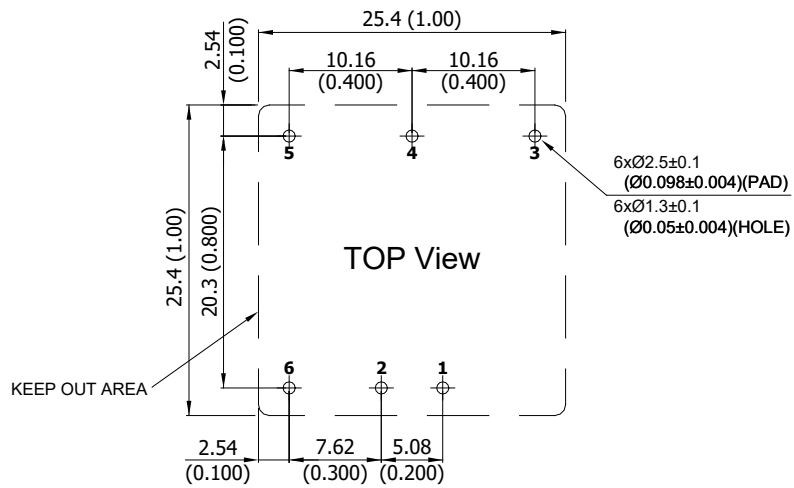

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 kHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

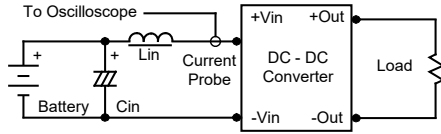

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

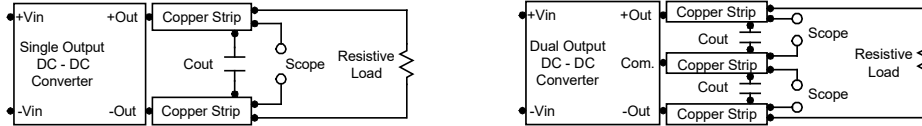

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal.

The switch can be an open collector or equivalent. A logic low is 0V to 1V. A logic high is 2.5V to 50V. The maximum sink current at on/off terminal during a logic low is -500 μ A. The maximum allowable leakage current of the switch at on/off terminal (2.5 to 50V) is 500 μ A.

Overload Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 6.8 μ F for the 24V and 48V devices.

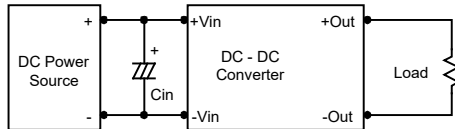

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.




Maximum Capacitive Load

The MJW10 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations


Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.




Remote On/Off Implementation

The positive logic remote ON/OFF control circuit is included. Turns the module ON during logic High on the ON/Off pin and turns OFF during logic Low. The ON/OFF input signal ($V_{on/off}$) that referenced to GND. If not using the remote on/off feature, please open circuit between on/off pin and -Vin pin to turn the module on.

Remote ON/OFF implementation

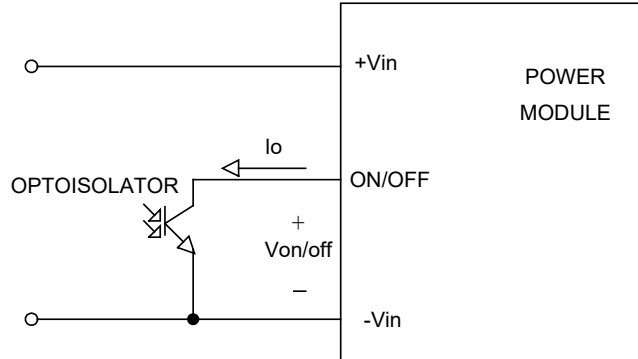


Isolated-Closure Remote ON/OFF

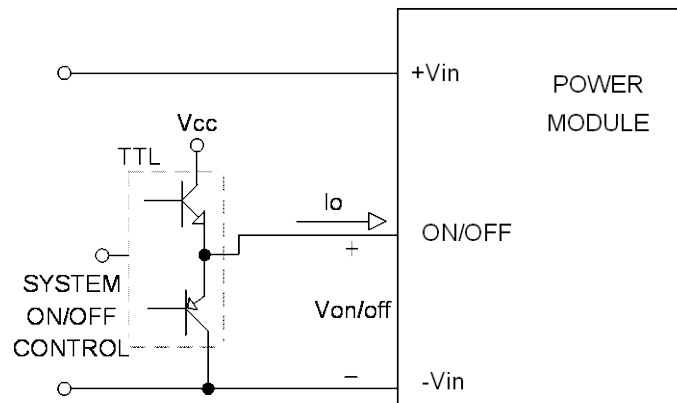

Level Control Using TTL Output


Packaging Information

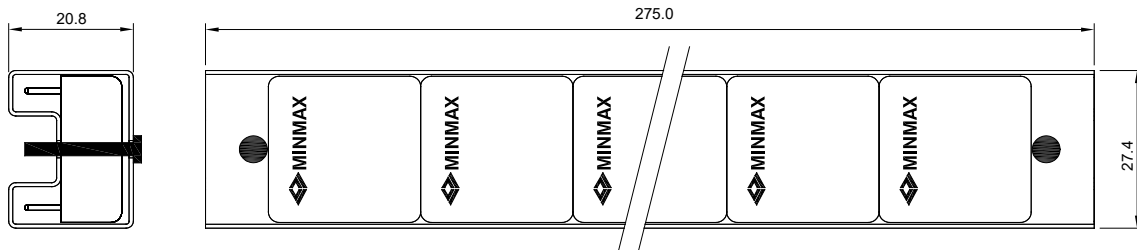

Unit: mm
10 PCS per TUBE

Wave Soldering Considerations

Lead free wave solder profile

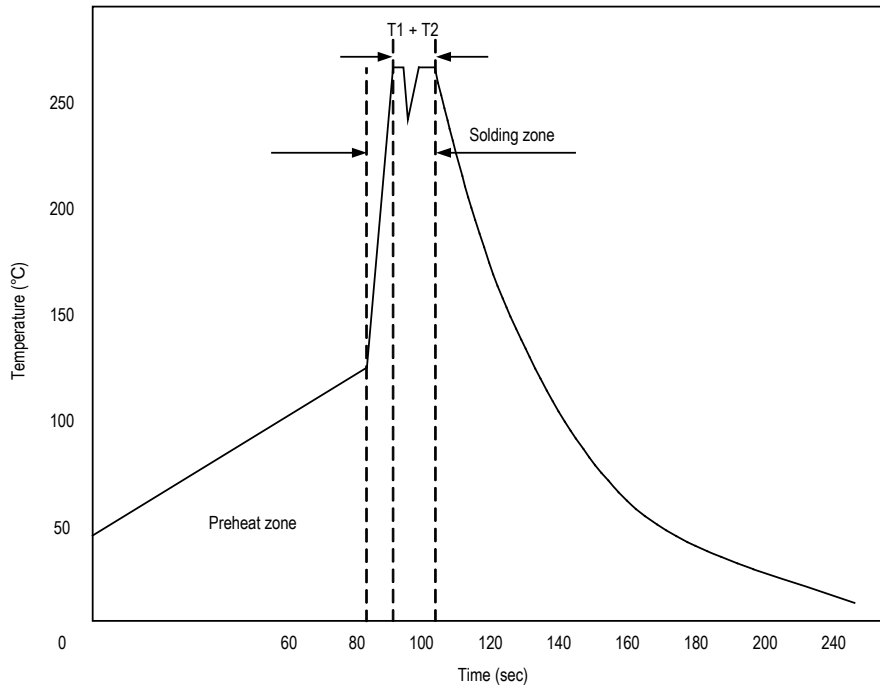

| Zone | Reference Parameter |
|---------|---------------------------------|
| Preheat | Rise temp. speed : 3°C/sec max. |
| zone | Preheat temp. : 100~130°C |
| Actual | Peak temp. : 250~260°C |
| heating | Peak time(T1+T2) : 4~6 sec |

Hand Welding Parameter

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

| Part Number Structure | | | | | | | |
|-------------------------|---------------------------------------|-------------------------|---------------------|---|-----------------|----------------|------------|
| M | J | WI | 10 | - | 24 | S | 033 |
| Package Type 1" X 1" | Ultra-wide 4:1 Input Voltage Range | Output Power 10 Watt | Input Voltage Range | | Output Quantity | Output Voltage | |
| | | | 24: 9 ~ 36 VDC | | S: Single | 033: 3.3 VDC | |
| | | | 48: 18 ~ 75 VDC | | D: Dual | 05: 5 VDC | |
| | | | | | | 051: 5.1 VDC | |
| | | | | | | 12: 12 VDC | |
| | | | | | | 15: 15 VDC | |
| | | | | | | 24: 24 VDC | |

| MTBF and Reliability | | |
|---|---------|-------|
| The MTBF of MJWI10 series of DC-DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign. | | |
| Model | MTBF | Unit |
| MJWI10-24S033 | 848,104 | Hours |
| MJWI10-24S05 | 849,907 | |
| MJWI10-24S051 | 849,907 | |
| MJWI10-24S12 | 922,254 | |
| MJWI10-24S15 | 926,012 | |
| MJWI10-24S24 | 976,849 | |
| MJWI10-24D05 | 803,665 | |
| MJWI10-24D12 | 812,942 | |
| MJWI10-24D15 | 839,983 | |
| MJWI10-48S033 | 874,508 | |
| MJWI10-48S05 | 847,529 | |
| MJWI10-48S051 | 847,529 | |
| MJWI10-48S12 | 924,044 | |
| MJWI10-48S15 | 927,816 | |
| MJWI10-48S24 | 985,999 | |
| MJWI10-48D05 | 791,139 | |
| MJWI10-48D12 | 832,362 | |
| MJWI10-48D15 | 832,362 | |