

FEATURES

- ▶ Smallest Encapsulated 10W Converter
- ▶ Industrial Standard DIP-16 Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +88°C
- ▶ Low No Load Power Consumption
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Conducted EMI EN 55032 Class A Approved
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX MDW10 series is a generation of high power density 65W/in³ in DC-DC converter modules. The product offers a full 10Watt isolated DC-DC converter within an small encapsulated DIP-16 package which occupied only 0.5in² of PCB space. There are 24 models available for 12、24 & 48VDC with wide 2:1 input voltage range. Further features included under-voltage protection, overload protection, short circuit protection, very low no load power consumption, no min. load requirement, fast start-up time and conducted EMI class A approved as well. An high efficiency allows operating temperatures range of -40°C to 88°C. All models have been qualified per the CB scheme with safety approvals to UL/cUL/IEC/EN 62368-1(60950-1).

These DC-DC converters offer a better solution for critical space applications to reduce PCB layout demand area like battery-powered equipment, instrumentation, distributed power architectures in communication, industrial electronics, energy facilities and others.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
				@Max. Load mA(typ.)	@No Load mA(typ.)		
MDW10-12S033	12 (9 ~ 18)	3.3	2700	940	20	2600	79
MDW10-12S05		5	2000	1016		1300	82
MDW10-12S051		5.1	2000	1037		1300	82
MDW10-12S12		12	833	969		560	86
MDW10-12S15		15	666	957		560	87
MDW10-12S24		24	416	956		200	87
MDW10-12D12		±12	±416	967		390#	86
MDW10-12D15		±15	±333	968		200#	86
MDW10-24S033		24 (18 ~ 36)	3.3	2700		464	10
MDW10-24S05	5		2000	502	1300	83	
MDW10-24S051	5.1		2000	512	1300	83	
MDW10-24S12	12		833	479	560	87	
MDW10-24S15	15		666	473	560	88	
MDW10-24S24	24		416	473	200	88	
MDW10-24D12	±12		±416	478	390#	87	
MDW10-24D15	±15		±333	478	200#	87	
MDW10-48S033	48 (36 ~ 75)		3.3	2700	232	8	
MDW10-48S05		5	2000	251	1300		83
MDW10-48S051		5.1	2000	256	1300		83
MDW10-48S12		12	833	239	560		87
MDW10-48S15		15	666	237	560		88
MDW10-48S24		24	416	236	200		88
MDW10-48D12		±12	±416	239	390#		87
MDW10-48D15		±15	±333	239	200#		87

For each output

Input Specifications						
Parameter	Conditions/Model	Min.	Typ.	Max.	Unit	
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC	
	24V Input Models	-0.7	---	50		
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	12V Input Models	---	---	9		
	24V Input Models	---	---	18		
	48V Input Models	---	---	36		
Under Voltage Shutdown	12V Input Models	---	8	---		
	24V Input Models	---	16	---		
	48V Input Models	---	34	---		
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	30	---	ms	
Input Filter	All Models	Internal Pi Type				

Output Specifications						
Parameter	Conditions/Model	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	---	±1.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.2	±0.8	%	
Load Regulation	Io=0% to 100%	---	---	±1.0	%	
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load	---	---	±5.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3, 5V, 5.1V Output	---	60	---	mV _{P-P}
		Other Output	---	80	---	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	---	500	μsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Hiccup	---	160	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)					

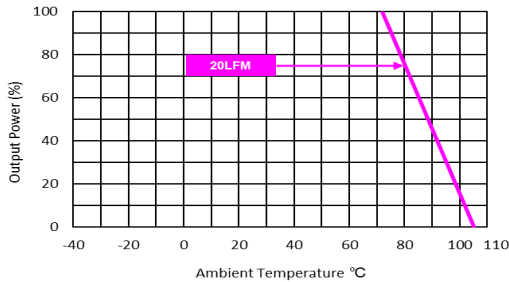
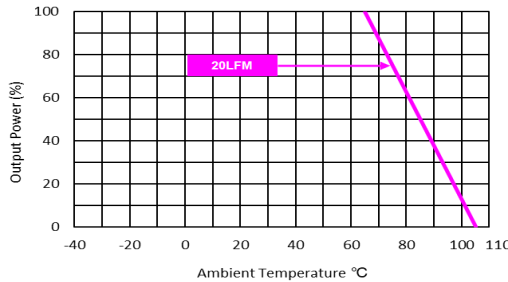
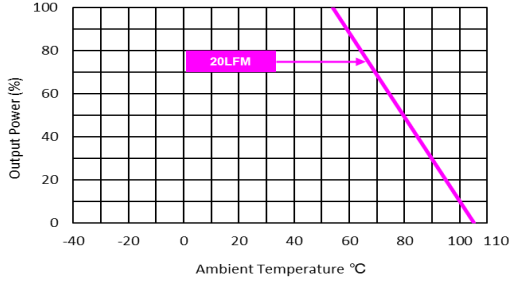
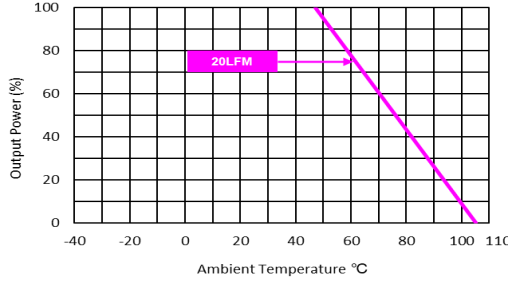
General Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC	
	1 Second	1800	---	---	VDC	
Isolation Voltage Input/Output to case		1000	---	---	VDC	
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ	
I/O Isolation Capacitance	100kHz, 1V	---	---	1500	pF	
Switching Frequency		---	420	---	kHz	
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,814,779	---	---	Hours	
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)					
	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)					

EMC Specifications					
Parameter	Standards & Level			Performance	
EMI ₍₅₎	Conduction	EN 55032	Without external components		Class A
	Radiation		With external components		
EMS ₍₅₎	EN 55024				
	ESD	Direct discharge		Indirect discharge HCP & VCP	A
		EN 61000-4-2 Air ± 8kV, Contact ± 6kV			
	Radiated immunity	EN 61000-4-3 20V/m			A
	Fast transient	EN 61000-4-4 ±2kV			A
	Surge	EN 61000-4-5 ±2kV			A
	Conducted immunity	EN 61000-4-6 10Vrms			A
PFMF	EN 61000-4-8 100A/m, 1000A/m (1 sec.)			A	

Environmental Specifications


Parameter	Conditions/Model	Min.	Max.	Unit
Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MDW10-12S15, MDW10-12S24, MDW10-24S12, MDW10-24S15 MDW10-24S24, MDW10-24D12, MDW10-24D15, MDW10-48S12 MDW10-48S15, MDW10-48S24, MDW10-48D12, MDW10-48D15		+72	°C
	MDW10-12S12, MDW10-12D12, MDW10-12D15	-40	+65	
	MDW10-12S05, MDW10-12S051, MDW10-24S033, MDW10-24S05 MDW10-24S051, MDW10-48S033, MDW10-48S05, MDW10-48S051		+54	
	MDW10-12S033		+47	
Case Temperature		---	+105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10 sec.)		---	260	°C

Power Derating Curve

	
MDW10-12S15, MDW10-12S24, MDW10-24S12, MDW10-24S15 MDW10-24S24, MDW10-24D12, MDW10-24D15, MDW10-48S12 MDW10-48S15, MDW10-48S24, MDW10-48D12, MDW10-48D15	MDW10-12S12, MDW10-12D12, MDW10-12D15
	
MDW10-12S05, MDW10-12S051, MDW10-24S033, MDW10-24S05 MDW10-24S051, MDW10-48S033, MDW10-48S05, MDW10-48S051	MDW10-12S033

Notes

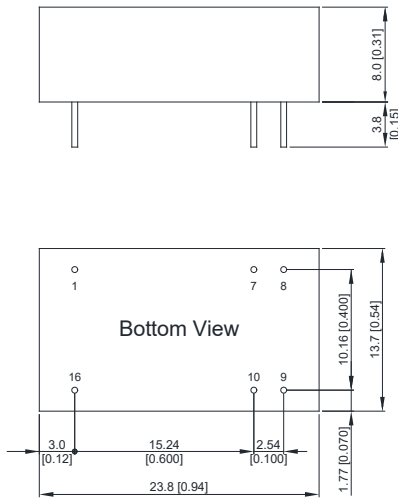- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 6 Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output	Diameter mm (inches)
1	-Vin	-Vin	∅ 0.5 [0.02]
7	NC	NC	∅ 0.5 [0.02]
8	NC	Common	∅ 0.5 [0.02]
9	+Vout	+Vout	∅ 0.5 [0.02]
10	-Vout	-Vout	∅ 0.5 [0.02]
16	+Vin	+Vin	∅ 0.5 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)


Physical Characteristics

Case Size	: 23.8x13.7x8.0 mm (0.94x0.54x0.31 inches)
Case Material	: Metal With Non-Conductive Baseplate
Pin Material	: Copper Alloy
Weight	: 6.5g

Test Setup

Peak-to-Peak Output Noise Measurement Test

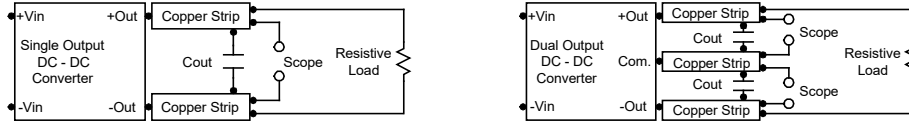Refer to the output specifications or add 4.7 μ F capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.




Technical Notes

Overload Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.


Input Source Impedance

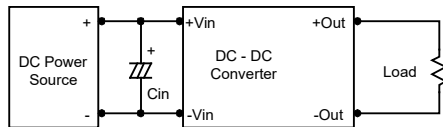The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 2.2 μ F for the 12V, 24V and 48V input devices, capacitor mounted close to the power module helps ensure stability of the unit.



Output Ripple Reduction

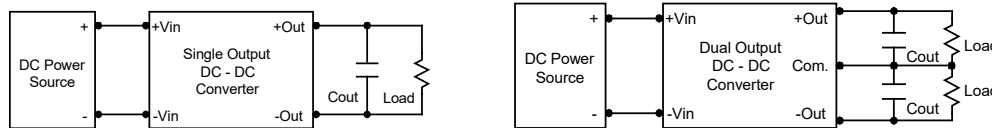A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.



Maximum Capacitive Load

The MDW10 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

